

AUTO
RESTART

FG
[WAVEFORM]

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 20 x 20 x 10 mm

GW2010
Series



Impeller : 5 blades ,made of plastic PBT UL94 V-0

扇 叶: 5叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW201005L	B/S	5	3.6~6.8	0.06	10000	1.05	0.03	0.085	21.2	18.8	3.8
GW201012L	B/S	12	6.0~13.5	0.03	10000	1.05	0.03	0.085	21.2	18.8	3.8
GW201005M	B/S	5	3.6~6.8	0.08	12000	1.145	0.032	0.104	25.9	21.3	3.8
GW201012M	B/S	12	6.0~13.5	0.05	12000	1.145	0.032	0.104	25.9	21.3	3.8
GW201005H	B/S	5	3.6~6.8	0.13	14000	1.351	0.038	0.169	42.1	24.2	3.8
GW201012H	B/S	12	6.0~13.5	0.08	14000	1.351	0.038	0.169	42.1	24.2	3.8


AIR SPACE

直
流
軸
流
風
扇

Air Flow & Static Pressure Curve

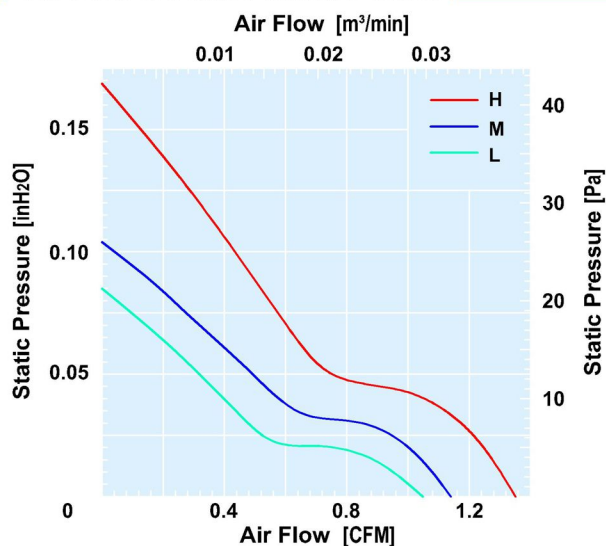

Dimensions Drawing

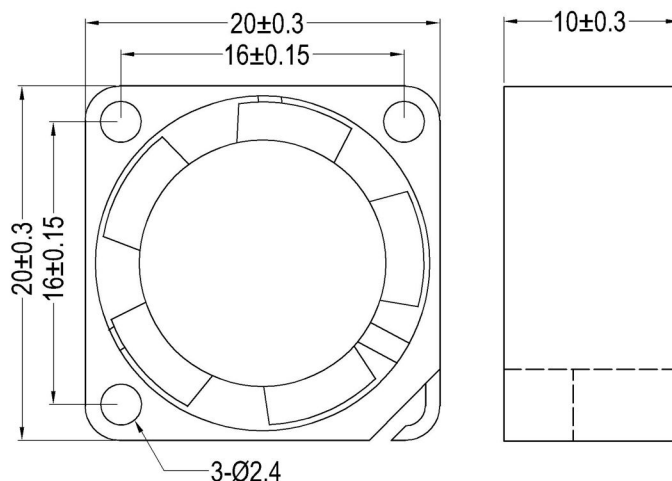

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

www.pudaelec.com