



Impeller : Made of SPCC

風 輪: 冷軋板

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44

防护等级: IP44

Insulation class : F


绝缘等级:F

Operating temperature : -25~+80°C

工作温度: -25~+80°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
S150HA1	Ball	1~115	60	1.50	150	2900	283	480	1.928	480	63	2450
S150HA2	Ball	1~230	50	0.60	120	2600	283	480	1.807	450	60	2450

Air Flow & Static Pressure Curve

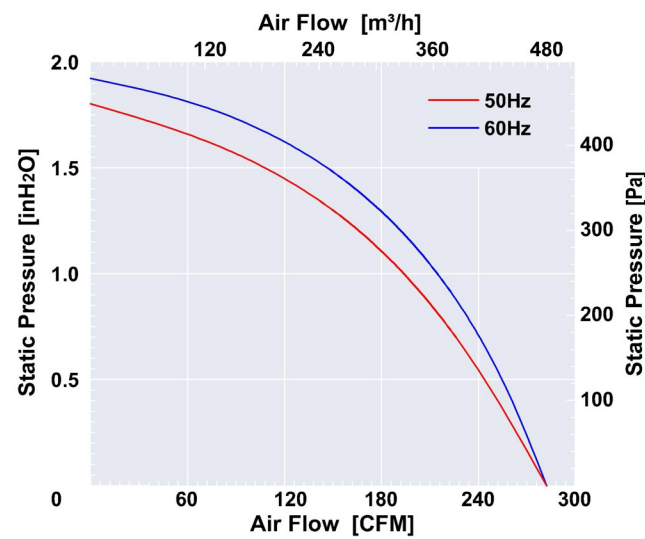

Dimensions Drawing

