



Impeller : Made of SPCC

風 輪: 冷軋板

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44

防护等级: IP44

Insulation class : F


绝缘等级:F

Operating temperature : -25~+80°C

工作温度: -25~+80°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
S200HA1-4P	Ball	1~115	60	0.90	110	1400	719	1220	1.124	280	53	3200
S200HA2-4P	Ball	1~230	50	0.50	110	1400	719	1220	1.124	280	53	3200
S200HA3L-4P	Ball	3~380	50	0.26	70	1400	719	1220	1.124	280	53	3200

Air Flow & Static Pressure Curve

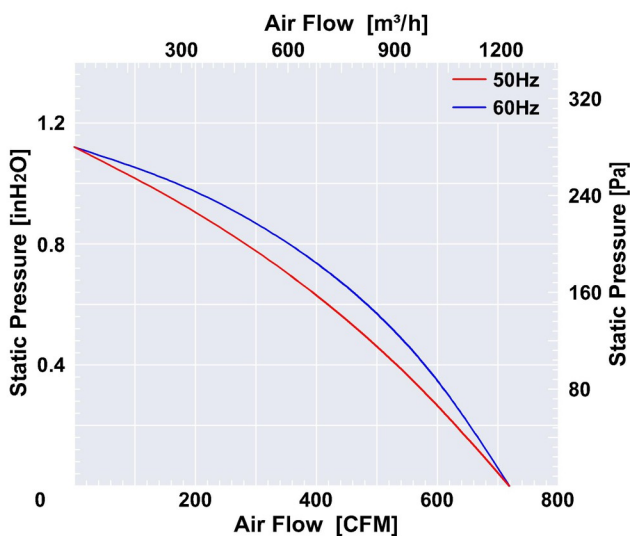

Dimensions Drawing

