

GW7010 DC AXIAL FAN Series

70 x 70 x 10 mm

- AUTO
RESTAR
- PWM
- FG
- RD
SIGNAL H
- RD
SIGNAL L





Impeller : 11 blades, made of plastic PBT UL94 V-0
 扇 叶: 11叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0
 扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor
 電 機: 4极无刷直流電機

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
GW701005L	B/S	5	3.6~6.8	0.21	2000	10.31	0.29	0.03	7.5	23.4	28
GW701012L	B/S	12	6.0~13.5	0.15	2000	10.31	0.29	0.03	7.5	23.4	28
GW701024L	B/S	24	18.0~26.5	0.08	2000	10.31	0.29	0.03	7.5	23.4	28
GW701005M	B/S	5	3.6~6.8	0.26	2500	14.71	0.42	0.06	15.0	27.2	28
GW701012M	B/S	12	6.0~13.5	0.19	2500	14.71	0.42	0.06	15.0	27.2	28
GW701024M	B/S	24	18.0~26.5	0.12	2500	14.71	0.42	0.06	15.0	27.2	28
GW701012H	B/S	12	6.0~13.5	0.26	3000	18.46	0.52	0.08	19.9	31	28
GW701024H	B/S	24	18.0~26.5	0.16	3000	18.46	0.52	0.08	19.9	31	28

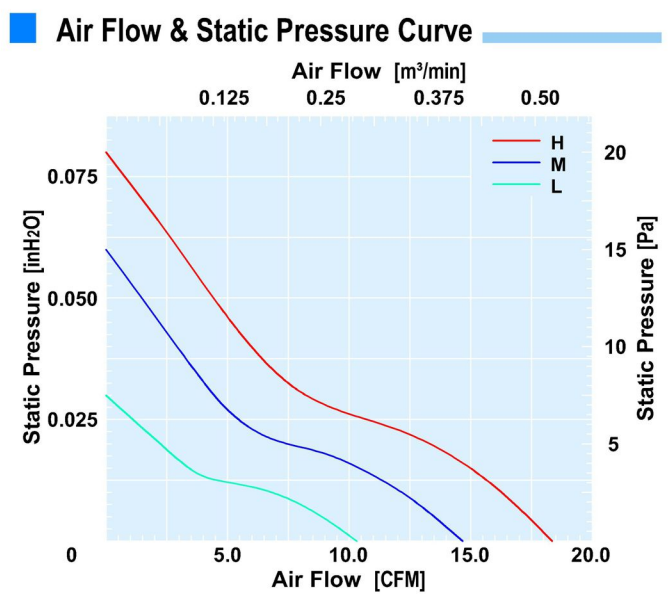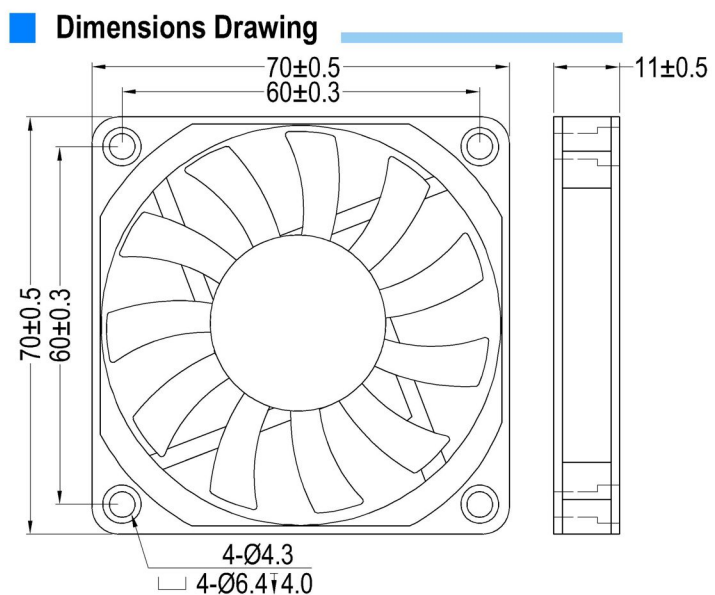

Above specification is only for reference and subject to change without notice.
 以上数据仅供参考, 如有变更恕不另行通知。