

AUTO (RESTAR) PWM FG RD SIGNAL H RD SIGNAL L



DC AXIAL FAN

□ 70 x 70 x 25 mm

GW7025 Series

Impeller : 7 blades, made of plastic PBT UL94 V-0

扇 叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW702512L	B/S	12	6.0~13.5	0.10	3000	22.71	0.64	0.14	34.86	34.0	64
GW702524L	B/S	24	18.0~26.5	0.07	3000	22.71	0.64	0.14	34.86	34.0	64
GW702512M	B/S	12	6.0~13.5	0.15	3500	25.21	0.71	0.18	44.8	37.8	64
GW702524M	B/S	24	18.0~26.5	0.09	3500	25.21	0.71	0.18	44.8	37.8	64
GW702512H	B/S	12	6.0~13.5	0.16	4000	32.64	0.93	0.24	59.8	42.0	65
GW702524H	B/S	24	18.0~26.5	0.11	4000	32.64	0.93	0.24	59.8	42.0	65
GW702512E	B/S	12	6.0~13.5	0.27	4900	44.37	1.26	0.44	109.6	45.6	67
GW702524E	B/S	24	18.0~26.5	0.17	4900	44.37	1.26	0.44	109.6	45.6	67
GW702512G	B/S	12	6.0~13.5	0.68	6000	61.08	1.73	0.55	137	54.0	68
GW702524G	B/S	24	18.0~26.5	0.30	6000	61.08	1.73	0.55	137	54.0	68
GW702548G	B/S	48	36.0~54.0	0.15	6000	61.08	1.73	0.55	137	54.0	68

Air Flow & Static Pressure Curve

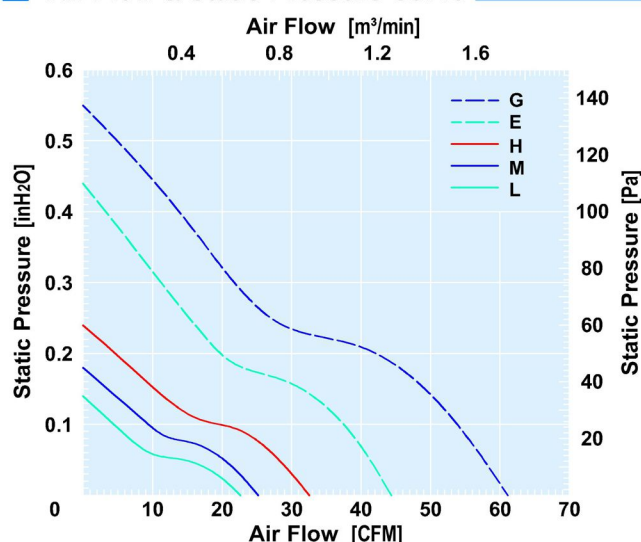

Dimensions Drawing

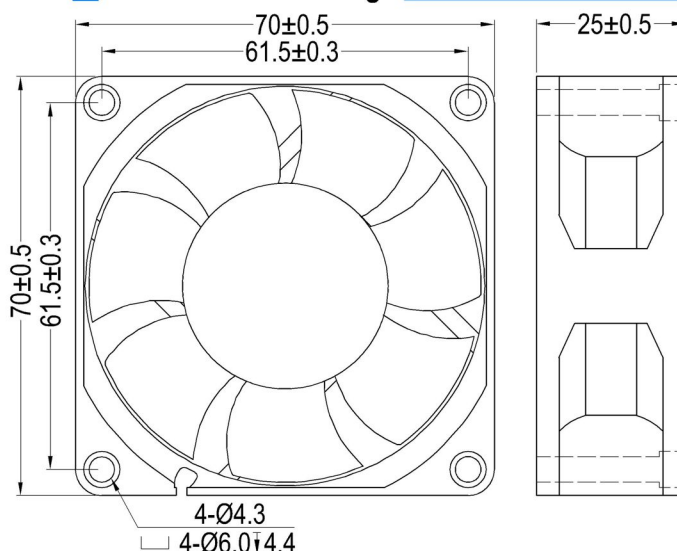

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。