



DC AXIAL FAN

□ 80 x 80 x 32 mm

GW8032
[增压型]
Series

Impeller : 7 blades, made of plastic PBT UL94 V-0

扇 叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW803212L	B/S	12	6.0~13.5	0.24	3500	48.6	1.38	0.53	132.4	45	145
GW803224L	B/S	24	18.0~26.5	0.15	3500	48.6	1.38	0.53	132.4	45	145
GW803212M	B/S	12	6.0~13.5	0.35	4200	58.3	1.65	0.64	158.9	49	148
GW803224M	B/S	24	18.0~26.5	0.22	4200	58.3	1.65	0.64	158.9	49	148
GW803212H	B/S	12	6.0~13.5	0.65	5000	69.4	1.97	0.756	188.4	53	150
GW803224H	B/S	24	18.0~26.5	0.33	5000	69.4	1.97	0.756	188.4	53	150
GW803212E	B/S	12	6.0~13.5	0.83	5800	80.5	2.28	0.878	218.6	56	150
GW803224E	B/S	24	18.0~26.5	0.45	5800	80.5	2.28	0.878	218.6	56	150

Air Flow & Static Pressure Curve

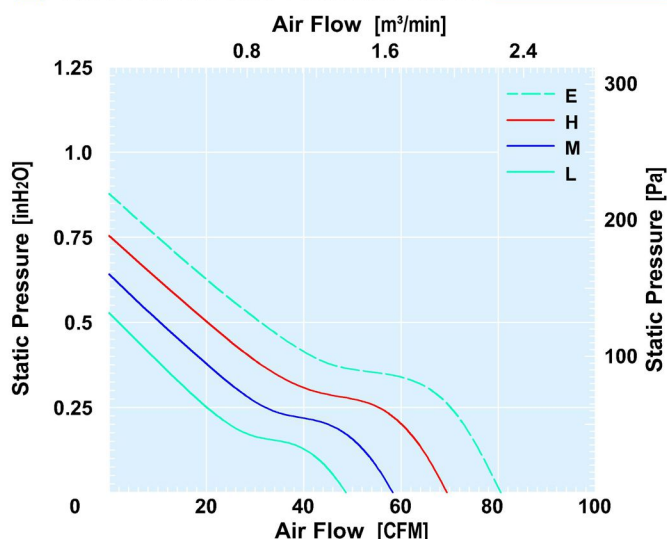

Dimensions Drawing

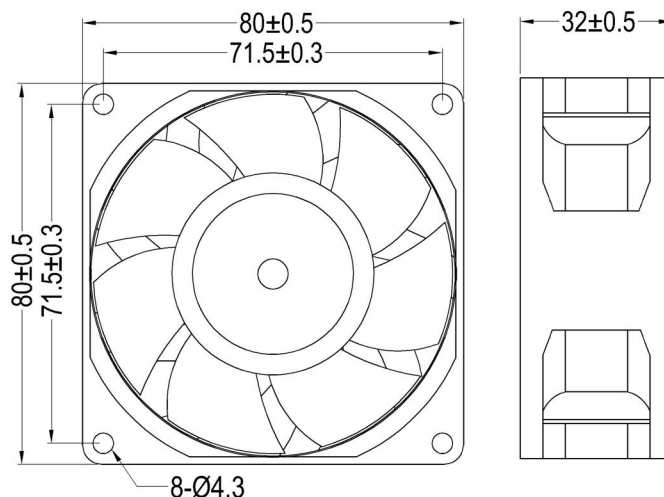

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。