



DC AXIAL FAN

□ 80 x 80 x 38 mm

GW8038

[增压型]

Series



Impeller : 7 blades, made of plastic PBT UL94 V-0

扇叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


电机: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
GW803812L	B/S	12	6.0~13.5	0.53	6000	77.2	2.19	0.73	182.3	48.4	180
GW803824L	B/S	24	18.0~26.5	0.27	6000	77.2	2.19	0.73	182.3	48.4	180
GW803848L	B/S	48	36.0~54.0	0.14	6000	77.2	2.19	0.73	182.3	48.4	180
GW803812M	B/S	12	6.0~13.5	0.75	7000	89.8	2.54	0.99	247.0	53.3	182
GW803824M	B/S	24	18.0~26.5	0.37	7000	89.8	2.54	0.99	247.0	53.3	182
GW803848M	B/S	48	36.0~54.0	0.19	7000	89.8	2.54	0.99	247.0	53.3	182
GW803812H	B/S	12	6.0~13.5	1.25	8500	109.1	3.09	1.35	335.3	58.8	185
GW803824H	B/S	24	18.0~26.5	0.62	8500	109.1	3.09	1.35	335.3	58.8	185
GW803848H	B/S	48	36.0~54.0	0.31	8500	109.1	3.09	1.35	335.3	58.8	185
GW803812E	B/S	12	6.0~13.5	1.90	10000	127.6	3.61	1.84	458.8	62.8	187
GW803824E	B/S	24	18.0~26.5	1.00	10000	127.6	3.61	1.84	458.8	62.8	187
GW803848E	B/S	48	36.0~54.0	0.44	10000	127.6	3.61	1.84	458.8	62.8	187
GW803812G	B/S	12	6.0~13.5	3.10	12000	153.8	4.36	2.46	613.7	68.1	190
GW803824G	B/S	24	18.0~26.5	1.55	12000	153.8	4.36	2.46	613.7	68.1	190
GW803848G	B/S	48	36.0~54.0	0.80	12000	153.8	4.36	2.46	613.7	68.1	190

Air Flow & Static Pressure Curve

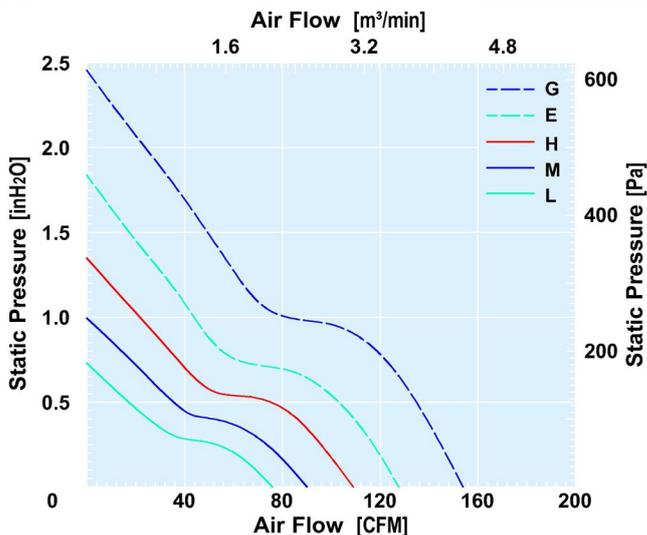

Dimensions Drawing

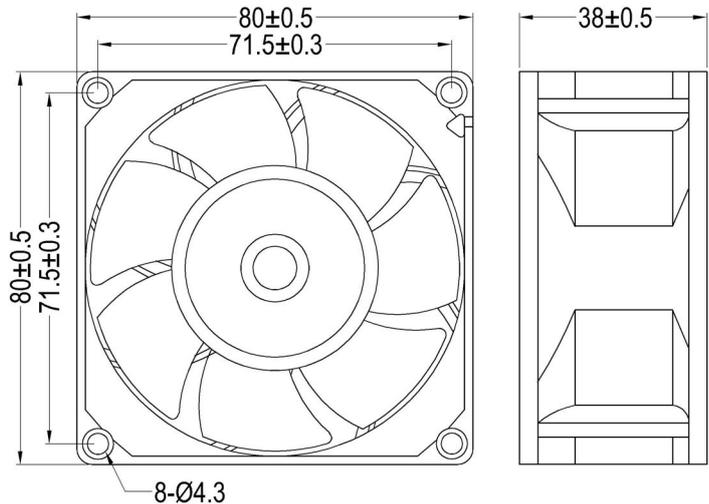

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。