

- AUTO (RESTAR)
- PWM
- FG
- RD SIGNAL H
- RD SIGNAL L

EC Centrifugal Fan Ø250 x 114 mm

YE250 Series



Impeller : 11 blades,made of GRP UL94 V-0
 風輪: 11叶,玻璃增强热固性塑料,阻燃等级UL94 V-0


Motor : DC brushless motor
 電機: 直流无刷電機

Degree of protection : IP54
 防护等级: IP54

Operating temperature : -25~+65°C
 工作温度: -25~+65°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
YE250H110	Ball	1~115	80~135	50/60	123	2750	657	1117.7	2.70	671.1	74.5	2000
YE250H220	Ball	1~230	180~265	50/60	123	2750	657	1117.7	2.70	671.1	74.5	2000

Air Flow and Static Pressure

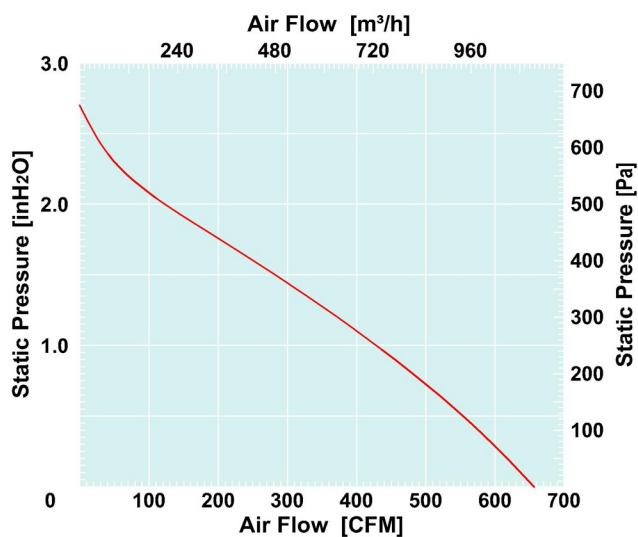

Dimensions Drawing

