



Impeller : Made of SPCC

風 輪: 冷軋板

Volute : Made of SPCC

蜗 壳: 冷軋板

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44


防护等级: IP44

Insulation class : F

绝缘等级:F

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [inchH ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
SG120HA1	Ball	1~115	60	0.80	90	2600	177	300	1.687	420	60	2500
SG120HA2	Ball	1~230	50	0.42	88	2400	159	270	1.406	350	58	2500
SG120HA3L	Ball	3~380	50	0.14	60	2400	159	270	1.406	350	58	2500

■ Air Flow & Static Pressure Curve

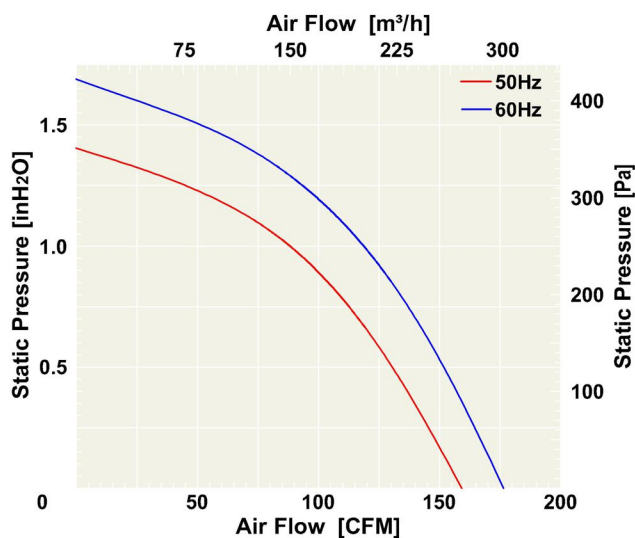

■ Dimensions Drawing

