



Impeller : Made of SPCC

風 輪: 冷軋板

Volute : Made of SPCC

蜗 壳: 冷軋板

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44


防护等级: IP44

Insulation class : F

绝缘等级:F

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [inchH <sub>2</sub> O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
SG140HA1	Ball	1~115	60	1.56	200	2500	277	471	2.00	500	69	3500
SG140HA2	Ball	1~230	50	0.65	160	2200	277	471	1.606	400	67	3500

Air Flow & Static Pressure Curve

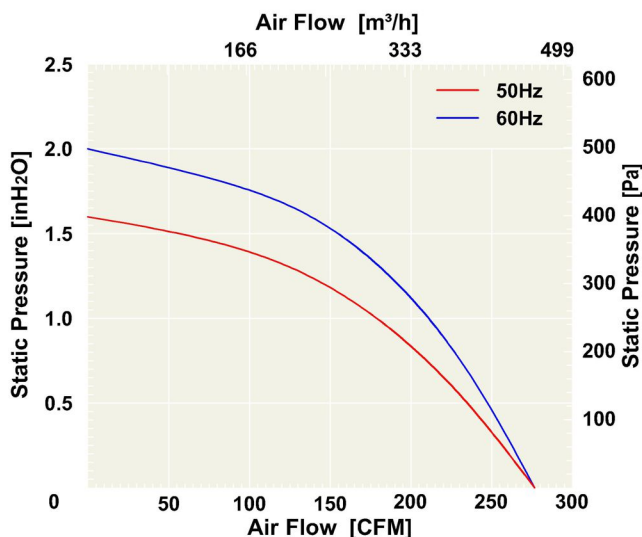

Dimensions Drawing

