



Impeller : Made of GRP(PBT) UL94 V-0
 風 輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0
 蜗 壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0


Motor : 4 Poles brushless DC motor
 電 機: 4极无刷直流電機

Degree of protection : IP54
 防护等级: IP54

Insulation class : B
 绝缘等级: B

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
B5020L05	B/S	5	3.6~6.8	0.17	4000	3.1	0.081	0.6	149.4	32	30
B5020L12	B/S	12	6.0~13.5	0.14	4000	3.1	0.081	0.6	149.4	32	30
B5020L24	B/S	24	18.0~26.5	0.07	4000	3.1	0.081	0.6	149.4	32	30
B5020M05	B/S	5	3.6~6.8	0.39	4500	3.9	0.11	0.75	186.8	37	32
B5020M12	B/S	12	6.0~13.5	0.19	4500	3.9	0.11	0.75	186.8	37	32
B5020M24	B/S	24	18.0~26.5	0.11	4500	3.9	0.11	0.75	186.8	37	32
B5020H12	B/S	12	6.0~13.5	0.23	5500	4.26	0.121	0.82	204	40	32
B5020H24	B/S	24	18.0~26.5	0.15	5500	4.26	0.121	0.82	204	40	32

Air Flow & Static Pressure Curve

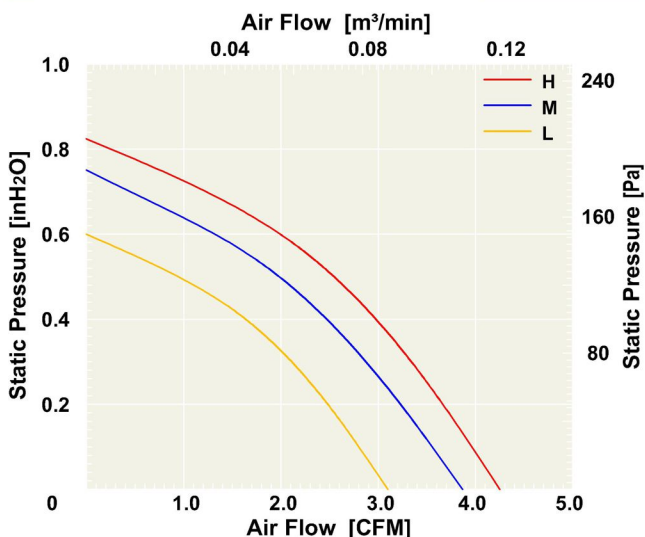

Dimensions Drawing

