

Impeller : Made of GRP(PBT) UL94 V-0

風 輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0

蜗 壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流電機

Degree of protection : IP54


防护等级: IP54

Insulation class : B

绝缘等级: B

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
B6015L05	B/S	5	3.6~6.8	0.25	3500	3.55	0.10	0.43	107	33	61
B6015L12	B/S	12	6.0~13.5	0.13	3500	3.55	0.10	0.43	107	33	61
B6015M12	B/S	12	6.0~13.5	0.20	4000	3.85	0.11	0.45	112	37	63
B6015M24	B/S	24	18.0~26.5	0.12	4000	3.85	0.11	0.45	112	37	63
B6015H12	B/S	12	6.0~13.5	0.28	4500	4.45	0.126	0.61	151.9	40	62
B6015H24	B/S	24	18.0~26.5	0.15	4500	4.45	0.126	0.61	151.9	40	62

Air Flow & Static Pressure Curve

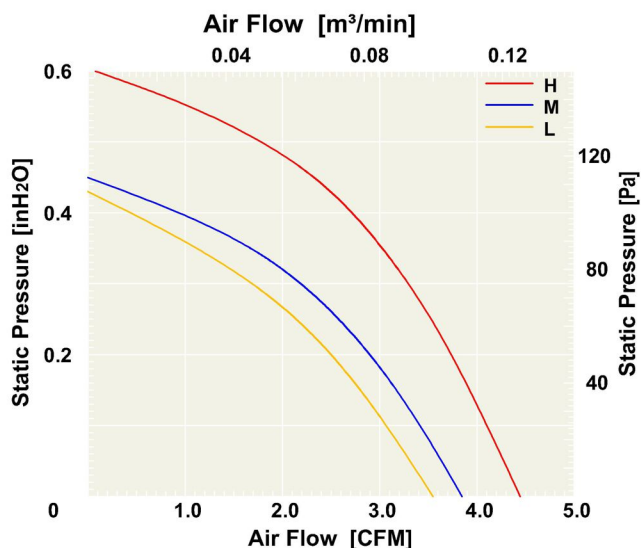

Dimensions Drawing

