



Impeller : Made of GRP(PBT) UL94 V-0

風 輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0

蜗 壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流電機

Degree of protection : IP54


防护等级: IP54

Insulation class : B

绝缘等级: B

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH <sub>2</sub> O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
B7525L12	B/S	12	6.0~13.5	0.11	2000	6.31	0.18	0.2	49.8	34	64
B7525L24	B/S	24	18.0~26.5	0.08	2000	6.31	0.18	0.2	49.8	34	64
B7525M12	B/S	12	6.0~13.5	0.22	2500	8.5	0.24	0.32	79.7	36	64
B7525M24	B/S	24	18.0~26.5	0.11	2500	8.5	0.24	0.32	79.7	36	64
B7525H12	B/S	12	6.0~13.5	0.26	3000	9.21	0.26	0.43	107.1	40	65
B7525H24	B/S	24	18.0~26.5	0.14	3000	9.21	0.26	0.43	107.1	40	65
B7525HH12	B/S	12	6.0~13.5	0.42	3500	11.11	0.31	0.54	134.5	43	65
B7525HH24	B/S	24	18.0~26.5	0.23	3500	11.11	0.31	0.54	134.5	43	65

**Air Flow & Static Pressure Curve**

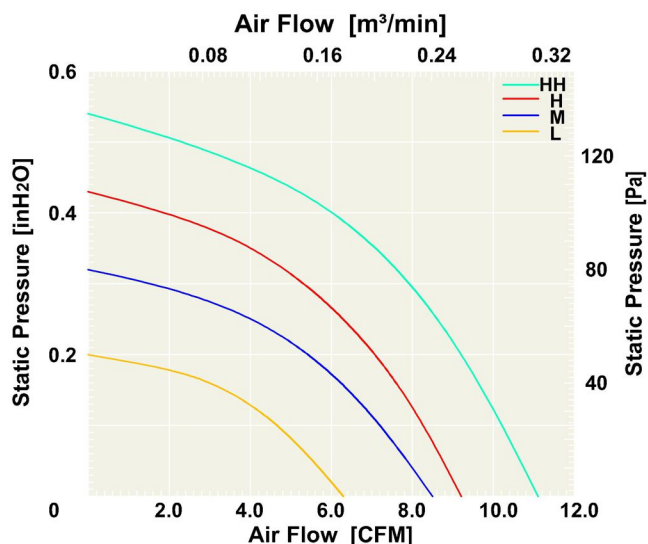

**Dimensions Drawing**

