



Impeller : 6 blades,made of aluminum

風 輪: 6叶, 铝制

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44

防护等级: IP44

Insulation class : F


绝缘等级:F

Operating temperature : -25~+80°C

工作温度: -25~+80°C

| Model (型号) | Bearing System (轴承) | Rated Voltage (电压) [VAC] | Freq. (频率) [Hz] | Current (电流) [A] | Input power (功率) [W] | Speed (转速) [RPM] | Maximum Air Flow (风量) [CFM] | Maximum Air Flow (风量) [m³/h] | Max. Static Pressure (静压) [in-H ₂ O] | Max. Static Pressure (静压) [Pa] | Noise Level (噪音) [dB-A] | Mass (质量) [g] |
|---------------|------------------------|--------------------------------|-----------------------|------------------------|----------------------------|------------------------|-----------------------------------|------------------------------------|---|--------------------------------------|-------------------------------|---------------------|
| JH400A4E02 | Ball | 1~230 | 50 | 1.2 | 260 | 1300 | 1855 | 3150 | 2.0 | 498 | 73 | 5650 |
| JH400A4E03 | Ball | 3~380 | 50 | 0.69 | 250 | 1300 | 1855 | 3150 | 2.0 | 498 | 70 | 5650 |
| JH400B4E02 | Ball | 1~230 | 50 | 1.20 | 275 | 1350 | 2355 | 4000 | 1.767 | 440 | 68 | 7000 |
| JH400B4E03 | Ball | 3~380 | 50 | 0.65 | 160 | 1350 | 2355 | 4000 | 1.767 | 440 | 68 | 7000 |

Air Flow & Static Pressure Curve

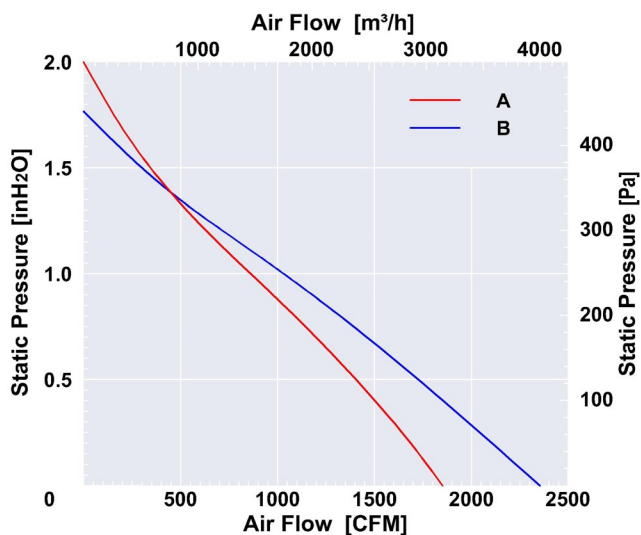

Dimensions Drawing

